


DRAWING NO.  
AL 88920

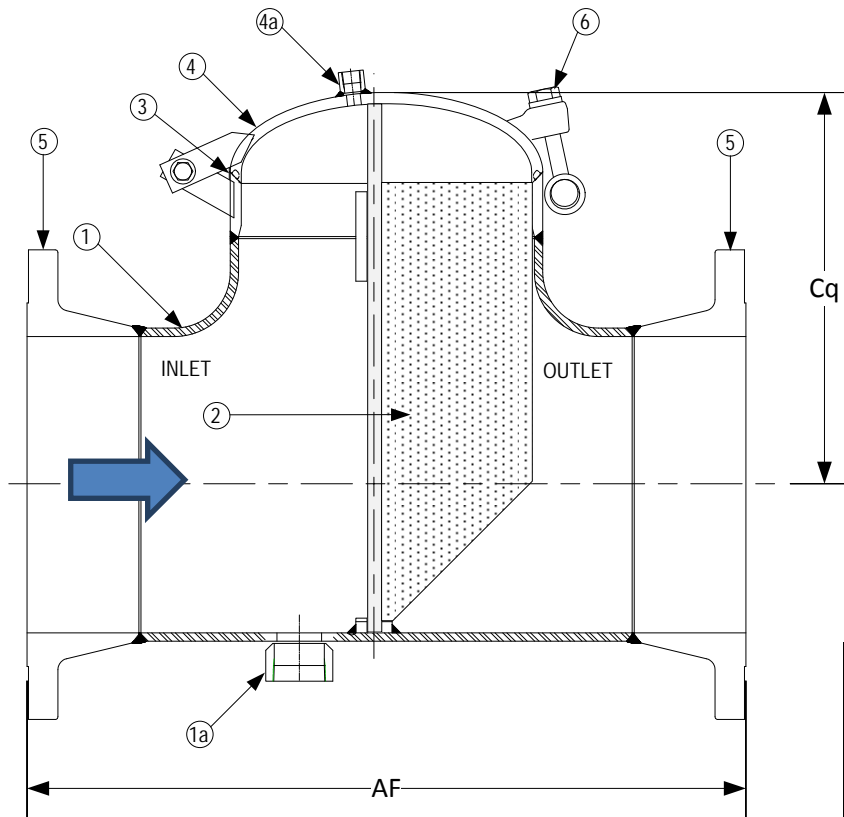

BODY PRESSURE & TEMPERATURE RATINGS – NON SHOCK									
NOM. RATING	Up to 450°F								
	6"	8"	10"	12"	14"	16"	18"	20"	24"
150#	320	185	245	255	210	185	185	175	190

Pressure limitations due to quick open cover design.

PARTS LIST		
ITEM	DESCRIPTION	MATERIAL
1	BODY	STAINLESS STEEL (ASTM A 403, CLASS WP-304)
1a	COUPLING – HALF, 3000# NPT	STAINLESS STEEL (ASTM A 182, GRADE F-304)
2	BASKET	STAINLESS STEEL (304) – 1/8" PERFORATION
3*	O-RING	BUNA-N
4	T-BOLT CLOSURE	STAINLESS STEEL (ASTM A 240, GRADE 304)
4a	COUPLING – HALF, 3000# NPT	STAINLESS STEEL (ASTM A 182, GRADE F-304)
5	150LB RFWN FLANGE	STAINLESS STEEL (ASTM A 182, GRADE F-304) B 16.5
6	SWING BOLTS	ALLOY STEEL (ASTM A 193, GRADE B7)

\*Buna-n o-ring good for temperatures up to 250°F. For higher temperatures up to 450°F, consult factory.

Product Numbers <sup>†</sup>	DIMENSIONS (in)					WEIGHT (lbs)	
	SIZE	AF	Cq	Vent	Drain	Force to Lift Cover	Total
62RFFT-F34125P34-BOQB	6"	18-1/4	9-1/4	1/2	2	4	94
82RFFT-F34125P34-BOQB	8"	22	10-5/8	1/2	2	9	154
102RFFT-F34125P34-BOQB	10"	25	13-1/8	1/2	2	12	235
122RFFT-F34125P34-BOQB	12"	29	15-5/8	1/2	2	15	355
142RFFT-F34125P34-BOQB	14"	32	16-1/8	1/2	2	20	465
162RFFT-F34125P34-BOQB	16"	34	18-5/8	1/2	2	26	562
182RFFT-F34125P34-BOQB	18"	38	20-7/8	1/2	2	32	750
202RFFT-F34125P34-BOQB	20"	41-3/8	23-5/8	1/2	2	40	1100
242RFFT-F34125P34-BOQB	24"	46	27-1/8	1/2	2	58	1600

<sup>†</sup>See "Style T Product Number Configuration" for additional options.

**KECKLEY**

3400 CLEVELAND SKOKIE ILLINOIS

DRAWING NO.  
AL 88920

DIMENSIONAL ASSEMBLY

PART NO.

150lb. Flg, Style TQ,

SCALE: NTS

Fabricated 304ss Tee Strainer

DATE: 04/03/2017

MAT'L: (As Noted Above)

REQ. ---

DR. BY DSF