

PARTS	LIST
-------	------

Item	Description	Material					
1	BODY	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
*†2	VALVE DISC	NITRILE					
3	DISC NUT	STAINLESS STEEL					
4							
5	INNER VALVE	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
*6	VALVE STEM	STAINLESS STEEL					
*7	STEM SNAP RING	STAINLESS STEEL					
8	BONNET (PACKING BOX)	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
9	YOKE LOCKNUT	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
10	PACKING GLAND	STAINLESS STEEL					
11	PACKING NUT	STAINLESS STEEL					
*12	PACKING	TEFLON					
13	GUIDE YOKE	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
14	GUIDE ARM	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
15	STEM CLEVIS	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
16	CLEVIS LOCKNUT	STAINLESS STEEL (ASTM A 351, GRADE CF8M)					
17	PIVOT PINS	STAINLESS STEEL					
18	PIVOT PIN RETAINERS	STAINLESS STEEL					
19	LEVER ASSEMBLY	STAINLESS STEEL					
20	FLOAT BALL	STAINLESS STEEL					
21	FLOAT ROD	STAINLESS STEEL					
22	ROD RETAINER	STAINLESS STEEL					
23	ROD RETAINER NUT	STAINLESS STEEL					
24	LIFT NUT	STAINLESS STEEL					
*Denot	*Denotes parts included in the rebuild kit						


^{*}Denotes parts included in the rebuild kit.

[†]Suitable for temperatures up to 125°F.

Size	DIMENSIONS							WEIGHT	
0.20	Α	В	С	D	Е	F	Float Dia.	Max Inlet	112.0
(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(PSI)	(lbs)
1/2	4-1/4	1-1/2	7	16	13-11/16	1-15/16	7	130	11
3/4	4-1/4	1-1/2	7	16	13-11/16	1-15/16	7	130	11
1	5	1-13/16	7-3/8	16	13-11/16	1-15/16	7	100	13
1-1/4	5-1/8	1-7/8	7-5/8	16	13-11/16	1-15/16	7	80	14
1-1/2	5-1/4	2-1/16	7-13/16	16	13-11/16	1-15/16	7	65	14

K KECK	DRAWING NO.	
3400 CLEVELAND SK	OKIE ILLINOIS	
DIMENSIONAL ASSI	PART NO.	
250Lb. Threaded Type	SCALE: NTS	
Float Valve	DATE: 09/01/2011	
MAT'L: SS Body / SS Trim	REQ	DR. BY DSF

DRAWING NO.

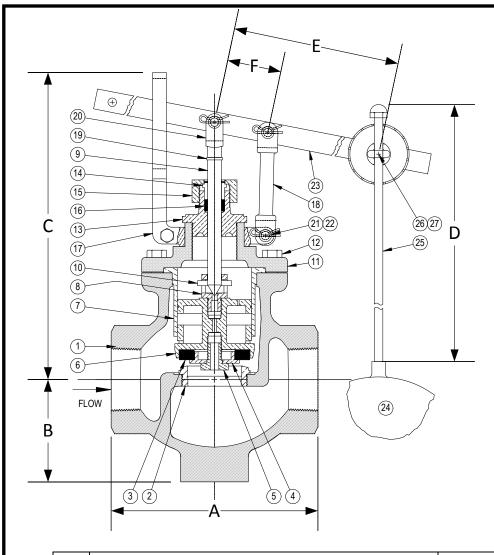

Size	DIMENSIONS						WEIGHT		
O.E.O	Α	В	С	D	E	F	Float Dia.	Max Inlet	***
(in)	(in)	(in)	(in)	(in)	(in)	(in)	(in)	(PSI)	(lbs)
2	7-5/8	3-5/8	7-3/8	16	17-3/8	2	7	50	35

PARTS LIST

Item	Description	Material				
1	BODY	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
*2	SEAT BUSHING	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
*†3	VALVE DISC	NITRILE				
4	DISC PLATE	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
5	DISC PLATE SCREW	STAINLESS STEEL				
6	INNER VALVE	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
7	CYLINDER	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
*8	PORT STUD	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
*9	VALVE STEM	STAINLESS STEEL				
*10	ROLL PIN	STAINLESS STEEL				
11	TOP CAP	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
12	CAP SCREW(S)	STAINLESS STEEL				
13	PACKING BOX (BONNET)	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
14	PACKING GLAND	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
15	PACKING NUT	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
*16	PACKING	TEFLON				
17	GUIDE YOKE	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
18	GUIDE ARM	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
19	CLEVIS LOCKWASHER	STAINLESS STEEL				
20	STEM CLEVIS	STAINLESS STEEL (ASTM A 351, GRADE CF8M)				
21	PIVOT PIN(S)	STAINLESS STEEL				
22	PIVOT PIN RETAINER(S)	STAINLESS STEEL				
23	LEVER ASSEMBLY	STAINLESS STEEL				
24	FLOAT BALL	STAINLESS STEEL (304)				
25	FLOAT ROD	STAINLESS STEEL				
26		STAINLESS STEEL				
27	ROD RETAINER NUT	STAINLESS STEEL				
*Denotes parts included in the rebuild kit						

^{*}Denotes parts included in the rebuild kit.

†Suitable for temperatures up to 125°F.

KKKECK	DRAWING NO.	
3400 CLEVELAND SK	OKIE ILLINOIS	
DIMENSIONAL ASSI	PART NO.	
250Lb. Threaded Type	SCALE: NTS	
Float Valve	DATE: 11/01/2018	
MAT'L: SS Body / SS Trim	DR. BY DSF	