


DRAWING NO.
AL 93280

BODY PRESSURE & TEMPERATURE RATINGS - NON SHOCK

NOM. RATING	4" TO 30"
Class 300	720 PSI @ 100°F

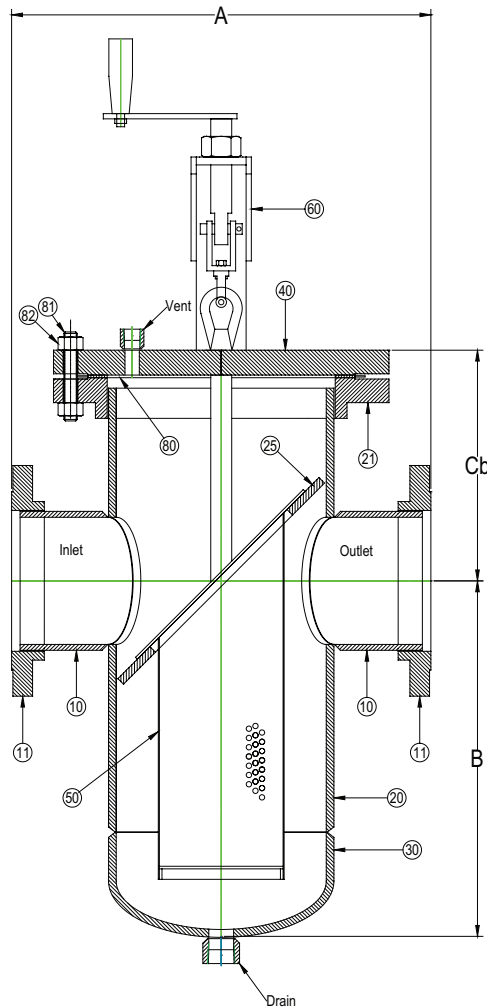

Product Number†	SIZE	DIMENSIONS (in)					SHELL	WEIGHT (lbs)	
		A	B	Cb	Vent	Drain		Cover	Total
44RFFB-F34125P34-FD	4	17	14	12-1/2	1/2	1	8	81	342
54RFFB-F34125P34-FD	5	17	15	13	1/2	1	8	81	354
64RFFB-F34125P34-FD	6	21	17	13	1/2	1	10	124	495
84RFFB-F34125P34-FD	8	23	21	14	1/2	1-1/2	12	185	695
104RFFB-F34125P34-FD	10	33	25	15	1/2	1-1/2	16	315	1153
124RFFB-F34125P34-FD	12	36	28	17	1/2	1-1/2	18	415	1513
144RFFB-F34125P34-FD	14	38	33	18-1/2	1/2	2	20	515	1855
164RFFB-F34125P34-FB	16	43	36	19-1/2	1/2	2	24	800	2806
184RFFB-F34125P34-FB	18	43	39	20	1/2	2	24	800	2872
204RFFB-F34125P34-FB	20	44	44	22	1/2	2	30	1249	4429
244RFFB-F34125P34-FB	24	49	44	23	1/2	2	30	1249	4524
304RFFB-F34125P34-FB	30	63	54	58	1/2	2	36	1921	6772

†See "Style FB Product Number Configuration" for additional options.

Dimension and weights are for reference only. When required, request certified drawings.

PARTS LIST

ITEM	DESCRIPTION	MATERIAL
10	NOZZLE	STAINLESS STEEL (ASTM A 312, GRADE TP304)
11	CLASS 300 RFSO FLG	STAINLESS STEEL (ASTM A 182, F304) B16.5
20	SHELL	STAINLESS STEEL (ASTM A 312, GRADE TP304)
21	CLASS 300 RFSO FLG	STAINLESS STEEL (ASTM A 182, F304) B16.5
25	SEAT	STAINLESS STEEL (ASTM A 240, F304)
30	WELD CAP	STAINLESS STEEL (ASTM A 403, GRADE WP304)
40	CLASS 300 RF BLIND FLG	STAINLESS STEEL (ASTM A 182, F304) B16.5
50	BASKET	STAINLESS STEEL (304) - 1/8" PERFORATION
60	LIFTING DAVIT ASSEMBLY	STAINLESS STEEL (ASTM A 312, GRADE TP304) AND (ASTM A 240, F304)
80	GASKET	FIBER
81	STUDS	ALLOY STEEL (ASTM A 193, GRADE B7)
82	NUTS	ALLOY STEEL (ASTM A 194, GRADE 2H)

*30" & LARGER FLANGES ARE RFWN (SERIES B).

NO DAVIT AVAILABLE ON 16" & UP. BOLTED COVER ONLY.

KECKLEY

3400 CLEVELAND

SKOKIE ILLINOIS

DRAWING NO.

AL 93280

DIMENSIONAL ASSEMBLY

PART NO.

4" to 30" Class 300 RF Flg Style FB-D

SCALE: NTS

DATE: 07/18/2023

MAT'L: (As Noted Above)

REQ. ---

DR. BY DSF